



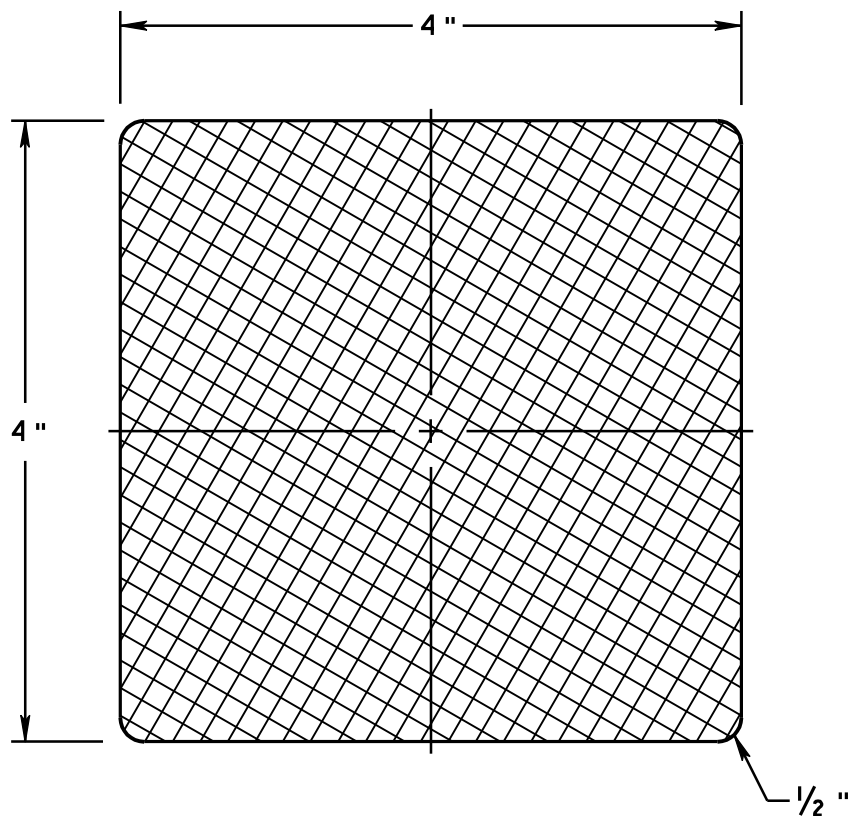

COLORS

- XS-1W - WHITE SHEETING (TYPE IX)
- XS-1Y - YELLOW SHEETING (FLUORESCENT)
- XS-1R - RED SHEETING (TYPE IX)

XS-1W CODE	
4"	100106
XS-1Y CODE	
4"	100116
XS-1R CODE	
4"	

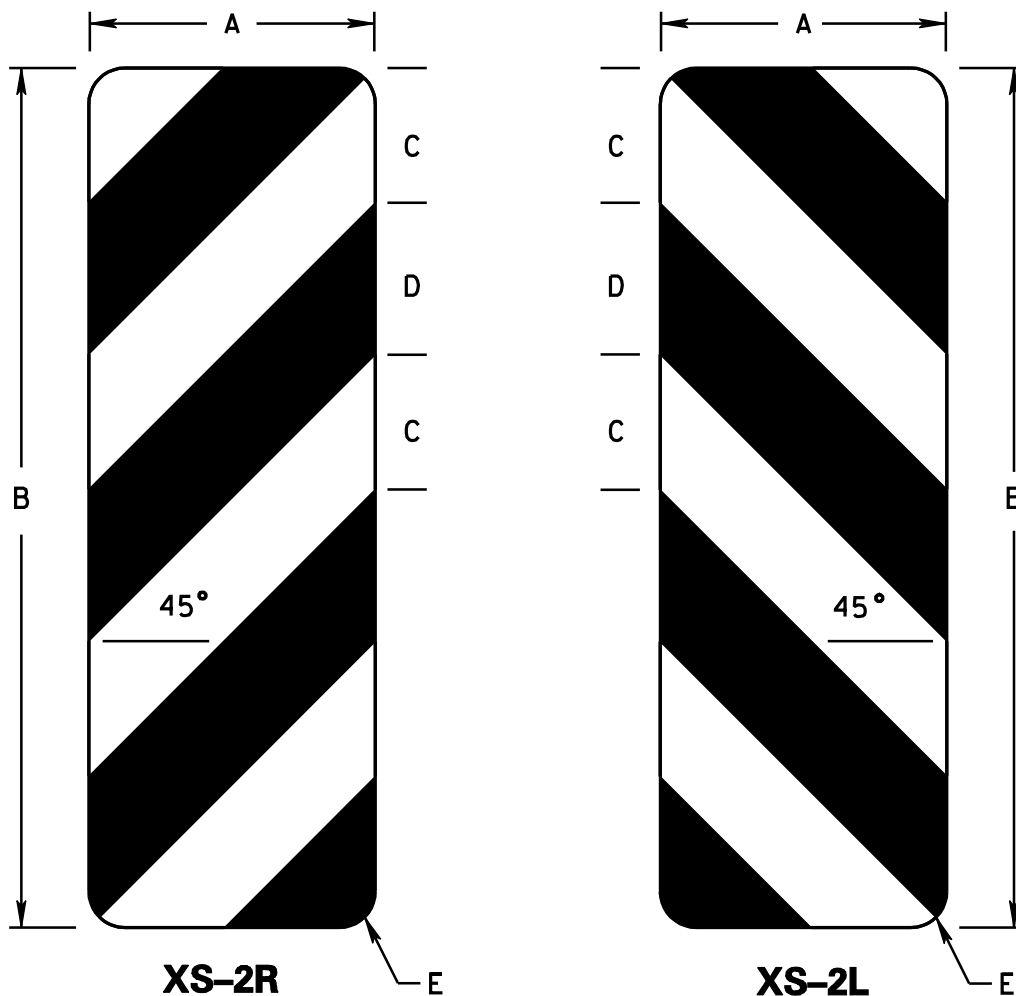

COLORS

STRIPE - YELLOW (FLUORESCENT)

BACKGROUND - BLACK (NON-REF)

DIMENSIONS (INCHES)

A	B	C	D	E
9	24	5 ⁵ / ₈	6 ³ / ₈	1 ¹ / ₂
12	36	5 ⁵ / ₈	6 ³ / ₈	1 ¹ / ₂

4" YELLOW ALTERNATED WITH 4 1/2" BLACK


FOR PLACEMENT DETAILS SEE STANDARD DETAIL TP5-2
SIGN SHALL NOT BE USED ON BRIDGES WITH FULL SHOULDER WIDTHS

WHEN USED IN CONSTRUCTION OR MAINTENANCE OPERATIONS
THE SIGN SHALL HAVE ORANGE REFLECTIVE STRIPES,
AND SHALL HAVE THE SUFFIX "M" ADDED TO THE FABRICATION NUMBER.


WV DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
TRAFFIC ENGINEERING DIVISION

XS-2R CODE		XS-2RM CODE	
9"x24"	100202	9"x24"	
12"x36"	100207	12"x36"	
XS-2L CODE		XS-2LM CODE	
9"x24"	100212	9"x24"	
12"x36"	100217	12"x36"	

XS-2

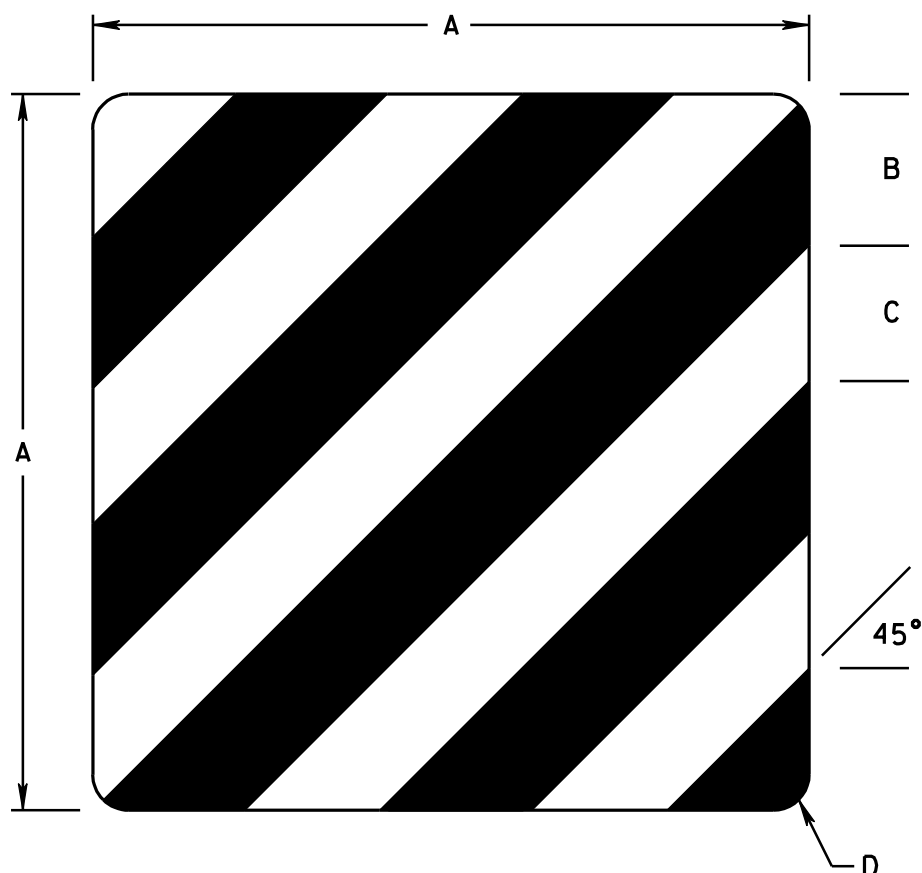

XS-3R



XS-3L

COLORS

STRIPE - YELLOW (FLUORESCENT)
BACKGROUND - BLACK (NON-REF)

DIMENSIONS (INCHES)

A	B	C	D
30	6 ³ / ₈	5 ⁵ / ₈	1 ¹ / ₂

4" YELLOW ALTERNATED WITH 4 1/2 " BLACK


FOR PLACEMENT DETAILS SEE STANDARD DETAIL TP5-2

SIGN SHALL NOT BE USED ON BRIDGES WITH FULL SHOULDER WIDTHS

WHEN USED IN CONSTRUCTION OR MAINTENANCE OPERATIONS
THE SIGN SHALL HAVE ORANGE REFLECTIVE STRIPES,
AND SHALL HAVE THE SUFFIX "M" ADDED TO THE FABRICATION NUMBER.

XS-3R CODE	XS-3RM CODE
30" 100303	30"
XS-3L CODE	XS-3LM CODE
30"	30"

XS-3

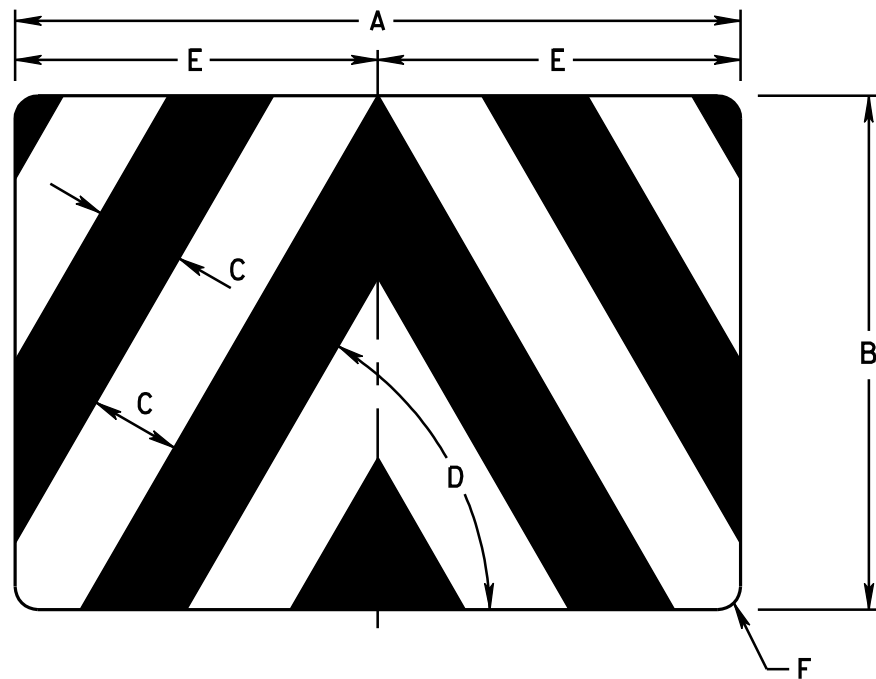

COLORS

LEGEND - YELLOW (FLUORESCENT)
BACKGROUND - BLACK (NON-REF)

DIMENSIONS (INCHES)

A	B	C	D	E	F
48	24	6	60°	24	1 1/2
48	34	6	60°	24	1 1/2

48 "x34 " - SAND BARREL

BOTH SIZES FABRICATED OF 0.040 " GAUGE ALUMINUM FOR
FLEXIBILITY IN MOUNTING TO IMPACT ATTENUATOR