



Temporary

Temporary




Temporary



Temporary

Temporary

Temporary





Temporary



Temporary

Temporary


Temporary

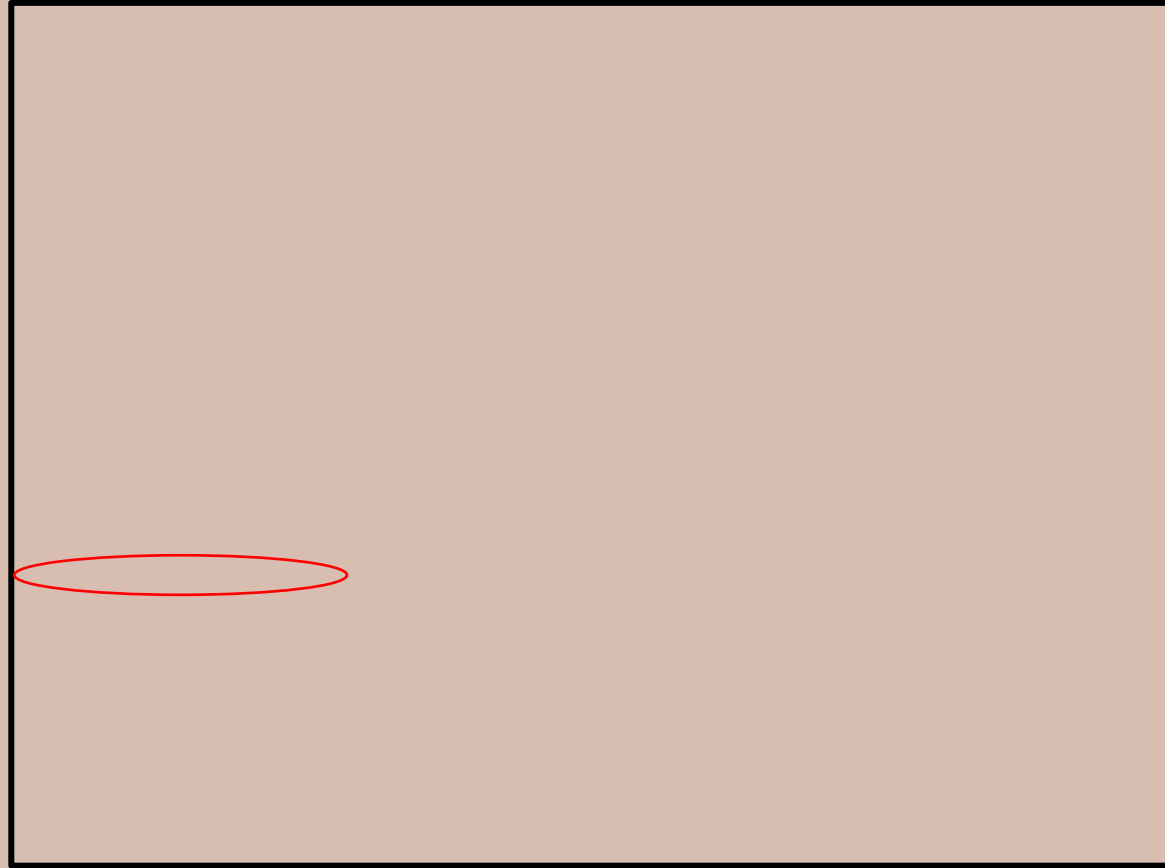


Temporary

Temporary

Temporary



Temporary




Temporary



Temporary




Temporary



Temporary



Temporary





Temporary




Temporary






Temporary



Temporary



Temporary



Temporary

Temporary

Guidance:

Flagger stations should be located such that an errant vehicle has additional space to stop without entering the work space.

Standard:

Except in emergency situations, flagger stations shall be preceded by an advance warning sign or signs. Except in emergency situations, flagger stations shall be illuminated at night.

Guidance:

The flagger should stand either on the shoulder adjacent to the road user being controlled or in the closed lane prior to stopping road users. A flagger should only stand in the lane being used by moving road users after road users have stopped. The flagger should be clearly visible to the first approaching road user at all times. The flagger also should be visible to other road users. The flagger should be stationed sufficiently in advance of the workers to warn them (for example, with audible warning devices such as horns, and whistles) of approaching danger by out-of-control vehicles. The flagger should stand alone, never permitting a group of workers to congregate around the flagger station.

Option:


Temporary



Temporary



Temporary



Temporary

Temporary



Temporary



